RNAV (GPS) RWY 4

MONROE RGNL (MLU)

WAAS	APP CRS	Rwy Idg	7507
CH 56410	042°	TDZE	78
W04A		Apt Elev	79

ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3000 direct IBECI and left turn via 035° track to GALIO and hold.

ATIS	MONROE APP CON ★	MONROE TOWER ★	GND CON	CLNC DEL	UNICOM
125.05	126.9 307.9	118.9 (CTAF) L 257.8	121.9	121.65	122.95

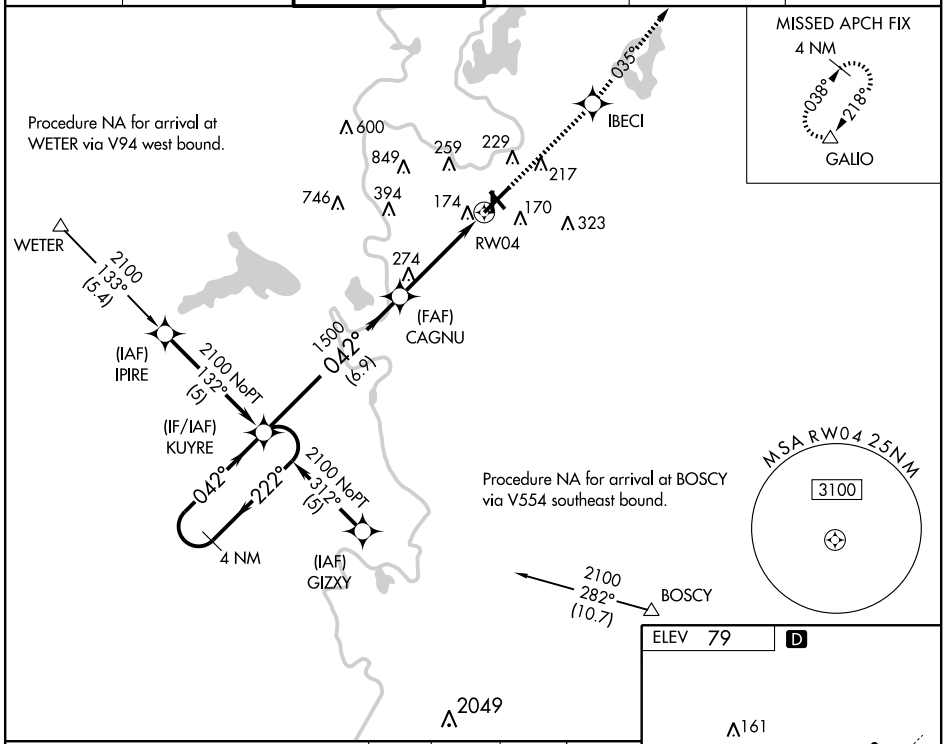

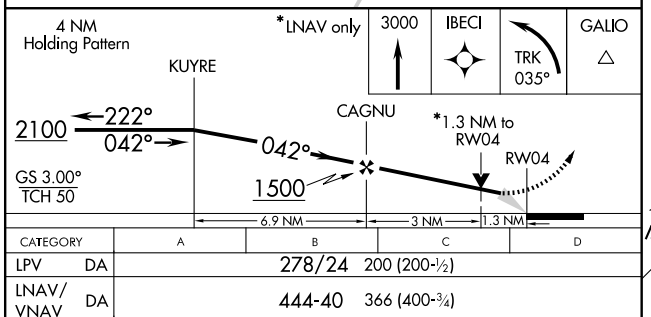

CATEGORY	A	B	C	D
LPV DA	278/24 200 (200-½)			
LNAV/VNAV DA	444-40 366 (400-¾)			
LNAV MDA	540/24 462 (500-½)		540/40 462 (500-¾)	540/50 462 (500-1)
CIRCLING	580-1 501 (600-1)		620-1½ 541 (600-1½)	640-2 561 (600-2)

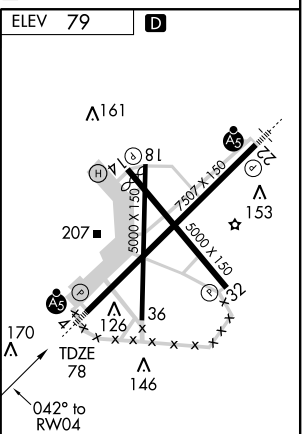

REIL Rwys 14 and 32
MIRL Rwy 14-32 L
HIRL Rwy 4-22 L

SC-4, 24 SEP 2009 to 22 OCT 2009
SC-4, 24 SEP 2009 to 22 OCT 2009