



VORTAC MLU 117.2 Chan 119	APP CRS 237°	Rwy Idg TDZE Apt Elev	7507 78 79
--	------------------------	-----------------------------	---------------------------------------

VOR RWY 22




MONROE RGNL (MLU)


 For inoperative MALSRS increase S-22 Cat A and B visibility to 1 mile.		MISSED APPROACH: Climb to 2000, then climbing right turn to 3000 direct MLU VORTAC and hold.	
--	---	--	--


ATIS 125.05	MONROE APP CON * 126.9 307.9	MONROE TOWER * 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

SC-4, 24 SEP 2009 to 22 OCT 2009

SC-4, 24 SEP 2009 to 22 OCT 2009

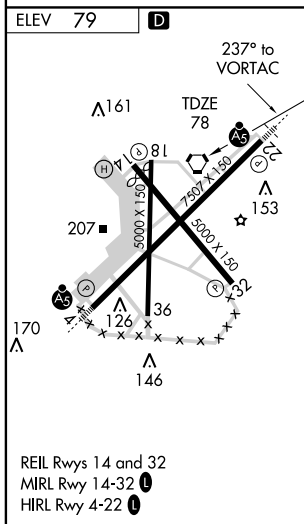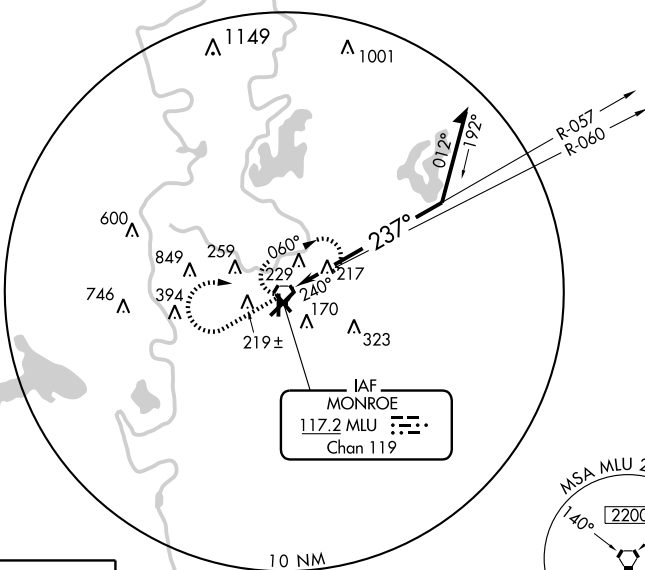

2000	3000	MLU
↑	↷	
		117.2

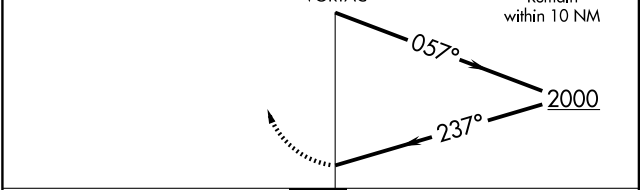

CATEGORY	A	B	C	D
S-22	640-3/4 562 (600-3/4)		640-1 562 (600-1)	640-1 3/4 562 (600-1 3/4)
CIRCLING	640-1 561 (600-1)		640-1 1/2 561 (600-1 1/2)	640-2 561 (600-2)